

Current Sensor

Product Series: STK-616TM

STK-616T-40MLB5

STK-616T-65MLB5

STK-616T-40MFB5

STK-616T-65MFB5

Part number: STK-616T-20MLB3


STK-616T-40MLB3

STK-616T-65MLB3

STK-616T-40MFB3

STK-616T-65MFB3

Version: Ver 1.5

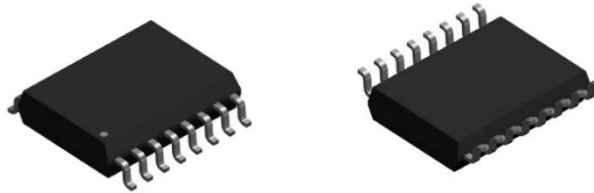

Sinomags Technology Co., Ltd

Web site: www.sinomags.com

CONTENT

1.	Description	2
2.	Part number definition	3
3.	Temperature vs Current.....	4
4.	Functional Block Diagram.....	4
5.	Electrical data STK-616T-XXMXB5	5
6.	Electrical data STK-616T-XXMXB3	6
7.	Dimension & Pin definitions with OCD function	7
8.	Pin definitions	8
9.	PCB layout recommendation	8
10.	Frequency bandwidth of STK-616T-XXMLBX.....	9
11.	Step response time of STK-616T-XXMLBX.....	9
12.	Frequency bandwidth of STK-616T-XXMFBX.....	10
13.	Step response time of STK-616T-XXMFBX	10
14.	Typical Application of STK-616TM.....	11
15.	Examples of OCD function	12
16.	General information on OCD.....	13
17.	PACKAGE MATERIALS INFORMATION	15

1. Description

The STK-616TM series current sensor is based on TMR (magneto resistance) technology and open-loop design. It is suitable for DC, AC pulsed and any kind of irregular current measurement under the isolated conditions.

Typical applications

- AC Variable speed drives
- Inverter
- AC/DC, DC/DC power supplies
- Switched model power supplies (SMPS)

General parameter

Parameter	Symbol	Unit	Value
Working temperature	T_A	°C	-40 ~ 125
Storage temperature	TMtg	°C	-40 ~ 125
Mass	m	g	0.5

Absolute maximum rating

Parameter	Symbol	Unit	Value
Supply voltage	V _{cc}	V	6
ESD rating (HBM)	U_ESD	kV	4
Junction temperature	T_J	°C	150

Remark: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.

Isolation parameter


Parameter	Symbol	Unit	Value	Comment
RMS voltage for AC test 50Hz/1 min	U _d	kV	3.6	
Impulse withstand voltage 1.2/50μs	Ū _w	kV	6	
Clearance distance (pri. -sec)	D _{ci}	mm	8	Determined by customer's layout
Creepage distance (pri. -sec)	D _{cp}	mm	8	

Measuring current table


Product	Meas. Range I _{pn} (A)	Sensitivity (mV/A)	V _{cc} (V)	T (°C)
STK-616T-20MLB3-1-1.65-E-0-C-N	±20A	66	3.3	-40 ~ 125
STK-616T-33MLB3-1-1.65-E-0-C-N	±33.3A	39.6	3.3	-40 ~ 125
STK-616T-40MLB3-1-1.65-E-2-C-N	±40A	33	3.3	-40 ~ 125
STK-616T-65MLB3-1-1.65-E-2-C-N	±65A	19.8	3.3	-40 ~ 125
STK-616T-40MFB3-1-1.65-E-2-C-N	±40A	33	3.3	-40 ~ 125
STK-616T-65MFB3-1-1.65-E-2-C-N	±65A	19.8	3.3	-40 ~ 125
STK-616T-40MLB5-1-2.5-E-2-C-N	±40A	50	5	-40 ~ 125
STK-616T-65MLB5-1-2.5-E-2-C-N	±65A	30	5	-40 ~ 125
STK-616T-40MFB5-1-2.5-E-2-C-N	±40A	50	5	-40 ~ 125

STK-616T-65MFB5-1-2.5-E-2-C-N	±65A	30	5	-40 ~ 125
-------------------------------	------	----	---	-----------


2. Part number definition

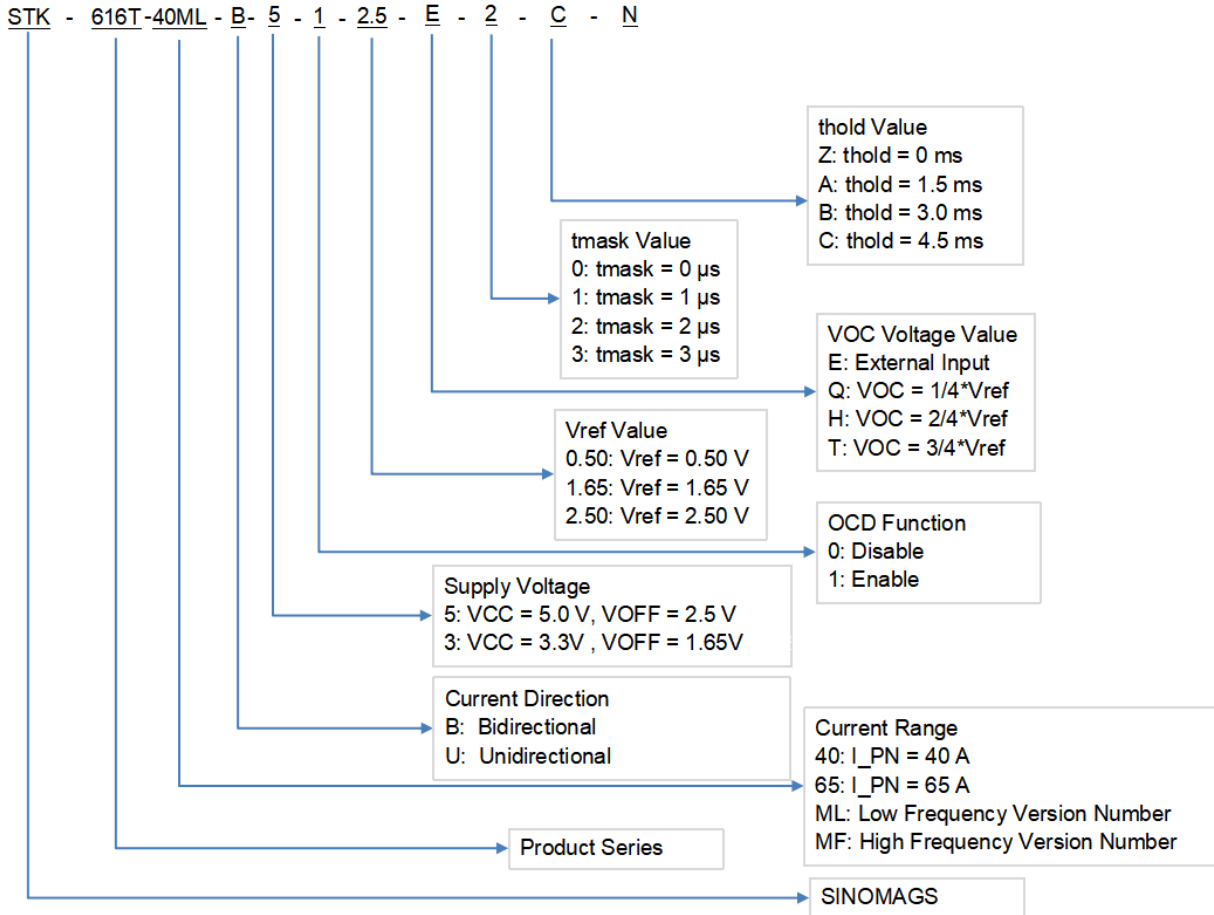

3. Temperature vs Current

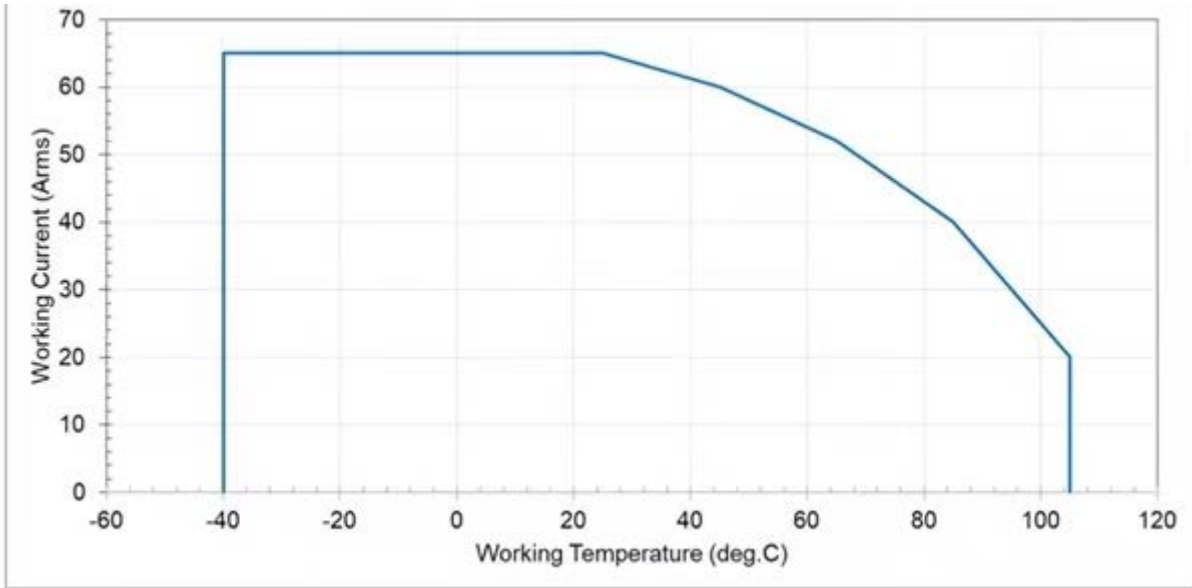

4. Functional Block Diagram

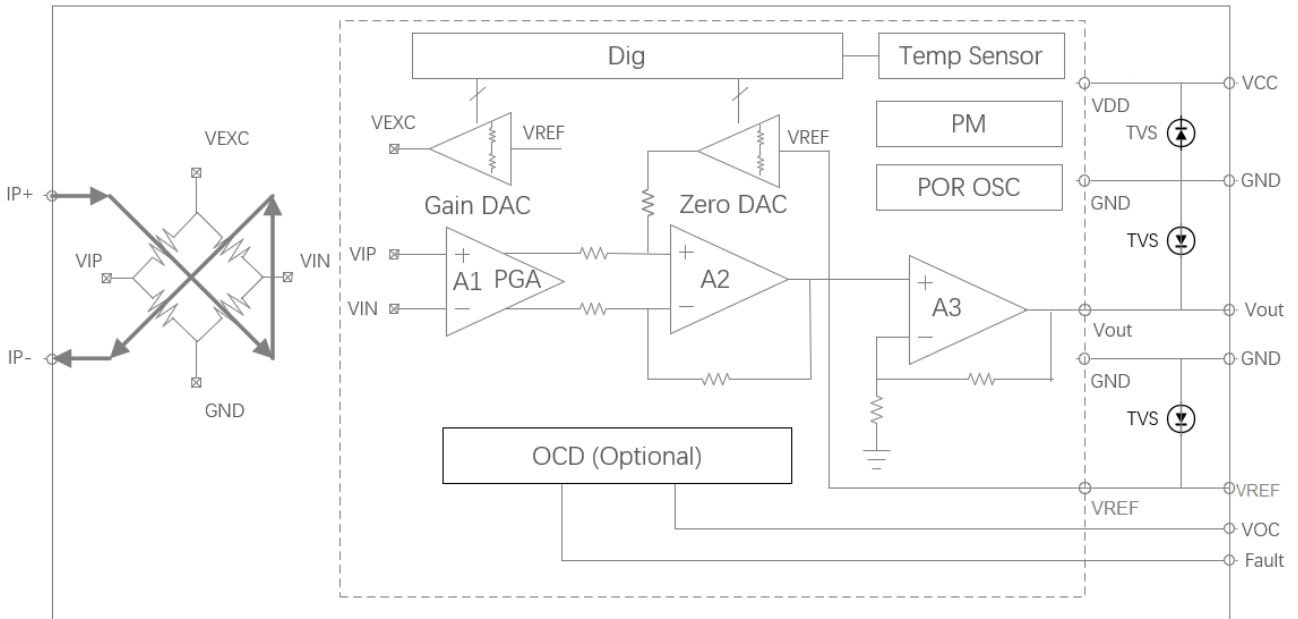

5. Electrical data STK-616T-XXMXB5

 Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 5\text{V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
General parameters						
Primary nominal current	I_{pn}	A	-40		40	STK-616T-40MXB5
			-65		65	STK-616T-65MXB5
Supply voltage	V_{CC}	V	4.5	5	5.5	
Current consumption	I_{CC}	mA		7	12	
Primary conductor resistance	R_{IP}	m Ω		0.9		
Quiescent voltage@0A	V_{off}	V	2.45	2.5	2.55	
Reference voltage	V_{ref}	V	2.45	2.5	2.55	
Electrical offset voltage	Offset	mV		± 10		$V_{off} - V_{ref}$
Output Specifications	R_{out}	Ω	1		30	
	R_{ref}		1		80	
Theoretical gain	G_{th}	mV/A		50		STK-616T-40MXB5
				30		STK-616T-65MXB5
OCD function (if applicable)						
OCD range	VOC	V	0.5		3.3	
FOULT error		%		5%		% of OCD
OCD	IHYS	%		10%		% of OCD
OCD Fault Mask	tmask	μs		2		0, 1, 2, 3 μs
OCD Fault Mask error	Tmask_error	ns		125		
OCD Fault Hold Time	thold	ms		4.5		0, 1.5, 3, 4.5 ms
Accuracy performance						
Rated linearity error@25 $^{\circ}\text{C}$	Non-L	% I_{pn}		± 1.5		$\pm I_{pn}$
Step response time	t_{res}	μs		0.9		@90% of I_{pn} STK-616T-XXMLBX
Frequency bandwidth	BW	MHz		0.6		@-3dB STK-616T-XXMLBX
Step response time	Hysteresis t_{res}	μs		0.3		@90% of I_{pn} STK-616T-XXMFBX
Frequency bandwidth	BW	MHz		1.5		@-3dB STK-616T-XXMFBX
Output voltage noise	V_{noise}	mVpp		20		
Accuracy @ 25 $^{\circ}\text{C}$	X	% I_{pn}		± 1.5		@ 0.5* I_{pn}
Thermal drift of G_{th}	GAIN_T	% G_{th}		± 1.5		@ -40~105 $^{\circ}\text{C}$ drift related to the value @25 $^{\circ}\text{C}$
Thermal drift of V_{off}	V_{off_T}	mV		± 15		
Total Accuracy	X_TRange	% I_{pn}		± 3.5		


6. Electrical data STK-616T-XXMXB3

 Condition: $T_A = 25^{\circ}\text{C}$, $V_{CC} = 3.3\text{V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
General parameters						
Primary nominal current	I_{pn}	A	-20		20	STK-616T-20MXB3
			-40		40	STK-616T-40MXB3
			-65		65	STK-616T-65MXB3
Supply voltage	V_{CC}	V	3.15	3.3	3.45	
Current consumption	I_{CC}	mA		7	12	
Primary conductor resistance	R_{IP}	m Ω		0.9		
Quiescent voltage@0A	V_{off}	V	1.6	1.65	1.7	
Reference voltage	V_{ref}	V	1.6	1.65	1.7	
Electrical offset voltage	Offset	mV		± 10		$V_{off} - V_{ref}$
Output Specifications	R_{out}	Ω	1		30	
	R_{ref}		1		80	
Theoretical gain	G_{th}	mV/A		66		STK-616T-20MXB3
				33		STK-616T-40MXB3
				19.8		STK-616T-65MXB3
OCD function (if applicable)						
OCD range	V_{OC}	V	0.5		3.3	
FOULT error		%		5%		% of OCD
OCD Hysteresis	I_{HYS}	%		10%		% of OCD
OCD Fault Mask	t_{mask}	μs		2		0, 1, 2, 3 μs
OCD Fault Mask error	T_{mask_error}	ns		125		
OCD Fault Hold Time	t_{hold}	ms		4.5		0, 1.5, 3, 4.5 ms
Accuracy performance						
Rated linearity error@25 $^{\circ}\text{C}$	Non-L	% I_{pn}		± 1.5		$\pm I_{pn}$
Step response time	t_{res}	μs		0.9		@90% of I_{pn} STK-616T-XXMLBX
Frequency bandwidth	BW	MHz		0.6		@-3dB STK-616T-XXMLBX
Step response time	t_{res}	μs		0.3		@90% of I_{pn} STK-616T-XXMFBX
Frequency bandwidth	BW	MHz		1.5		@-3dB STK-616T-XXMFBX
Output voltage noise	V_{noise}	mVpp		20		
Accuracy @ 25 $^{\circ}\text{C}$	X	% I_{pn}		± 1.5		@ $0.5 \cdot I_{pn}$
Thermal drift of G_{th}	$GAIN_T$	% G_{th}		± 1.5		@ -40~105 $^{\circ}\text{C}$
Thermal drift of V_{off}	V_{off_T}	mV		± 15		

Total Accuracy	X_TRange	% I _{pn}	±3.5	drift related to the value @25°C
----------------	----------	-------------------	------	----------------------------------

7. Dimension & Pin definitions with OCD function

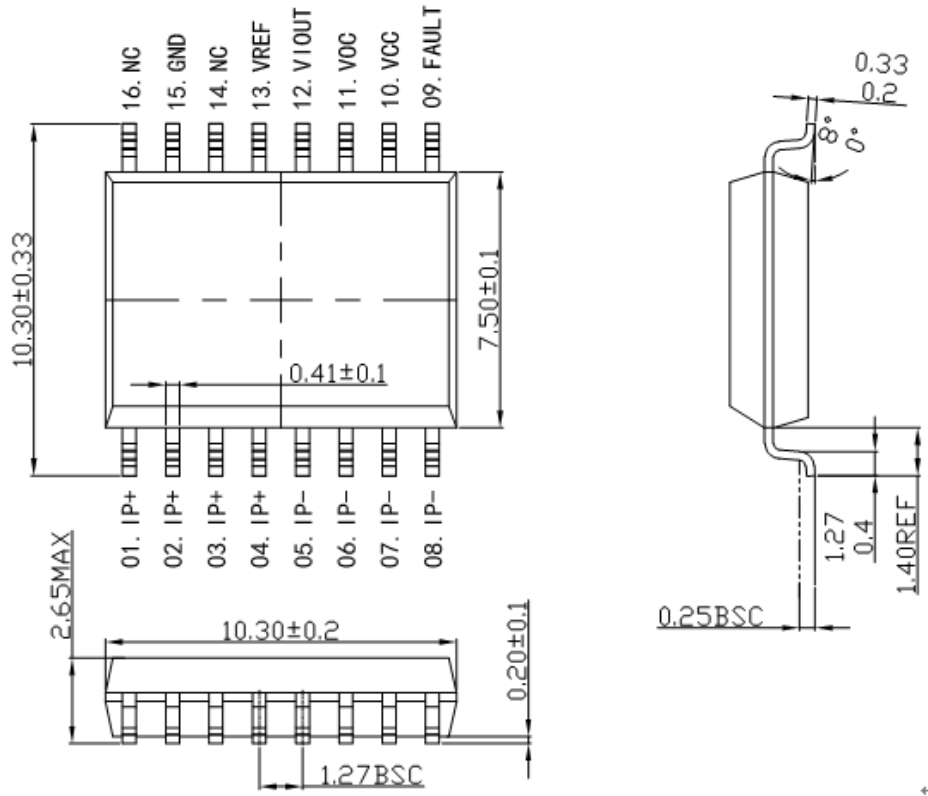


8. Pin definitions


Pin definition for product with OCD function

PIN	Symbol	Description
1,2,3,4	IP+	Primary conductor pin (+)
5,6,7,8	IP-	Primary conductor pin (-)
9	FAULT	Over current detection alarm output, the pin is open leakage output. Normally, the output of fault pin is high level.
10	VCC	Power supply pin
11	VOC	Over current detection threshold input pin
12	VIOUT	Sensor output pin
13	VREF	Reference pin, output function
14	NC	No connection
15	GND	Ground pin (GND)
16	NC	No connection


9. PCB layout recommendation

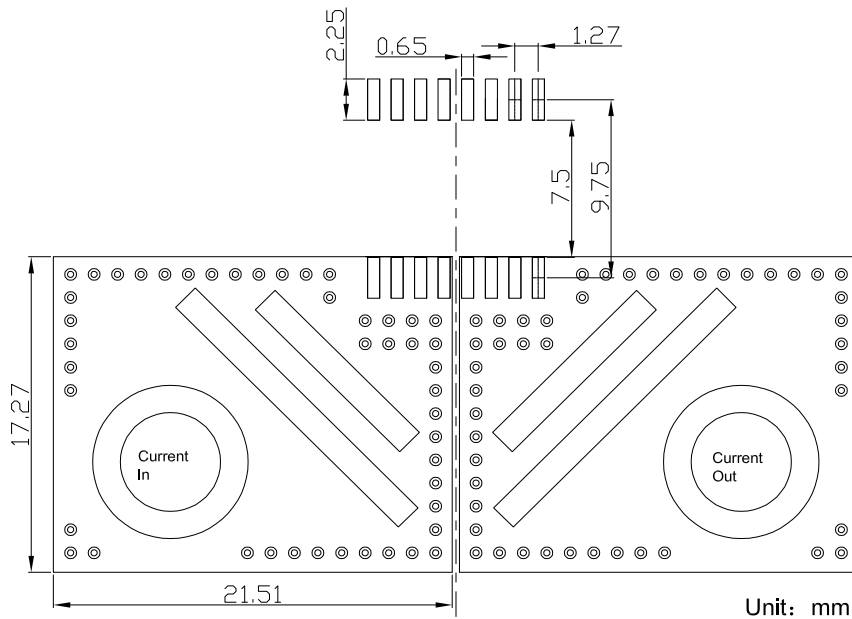

10. Frequency bandwidth of STK-616T-XXMLBX

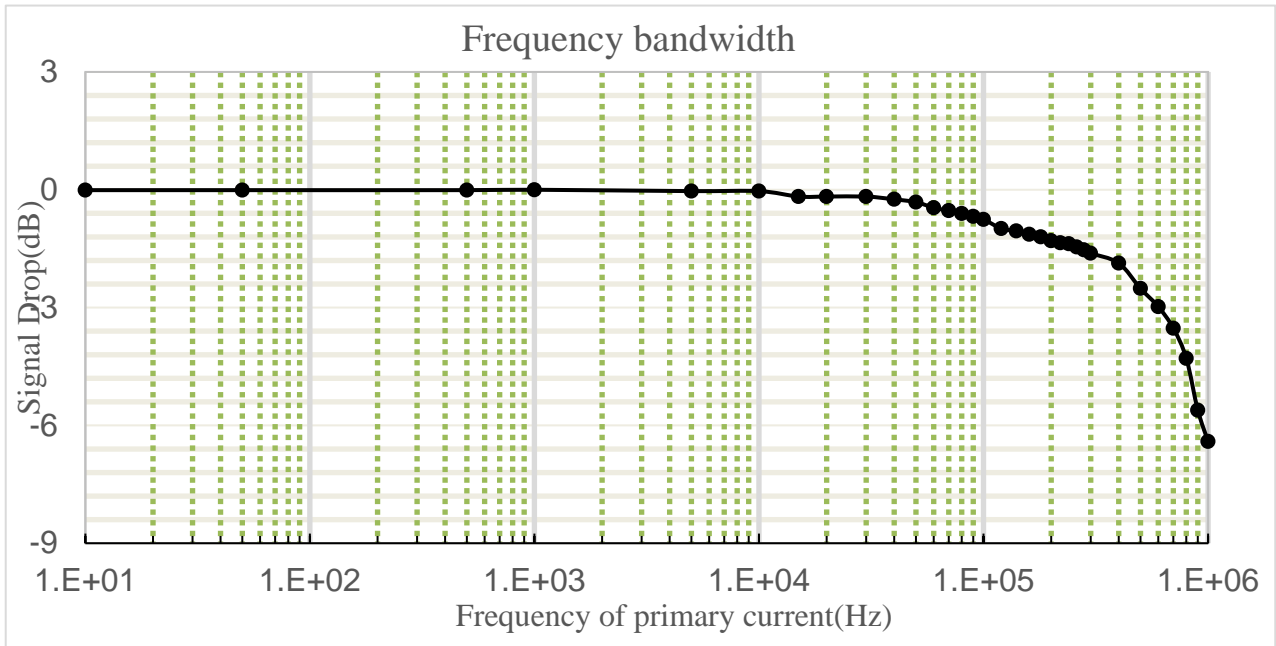


11. Step response time of STK-616T-XXMLBX

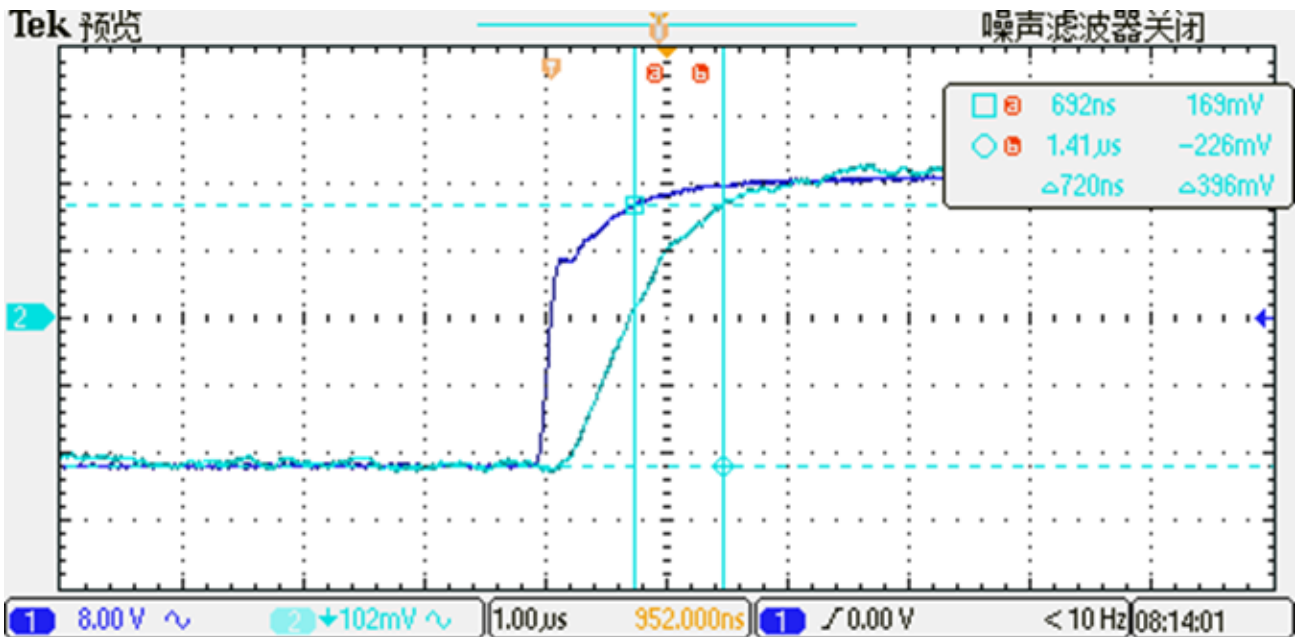


The typical low frequency response of STK-616TM current sensor. The response time from 90% of the primary current to 90% of the secondary output is 0.9 μs.

12. Frequency bandwidth of STK-616T-XXMFBX

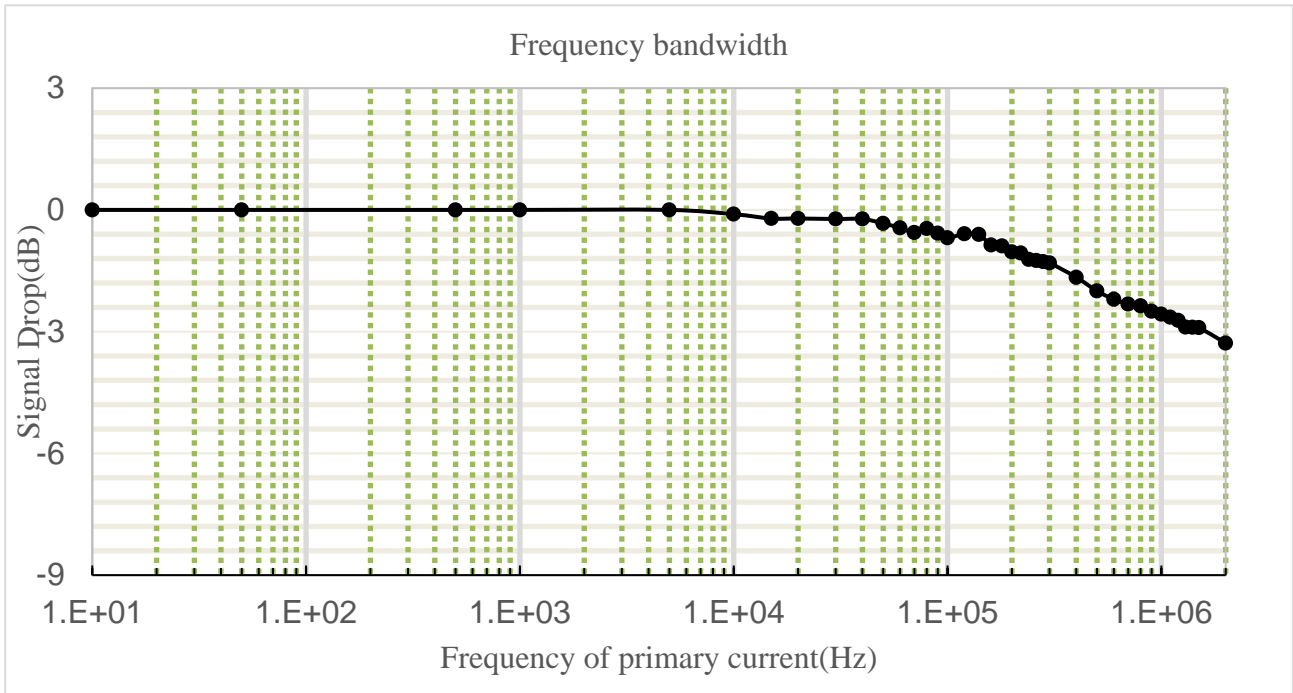


13. Step response time of STK-616T-XXMFBX

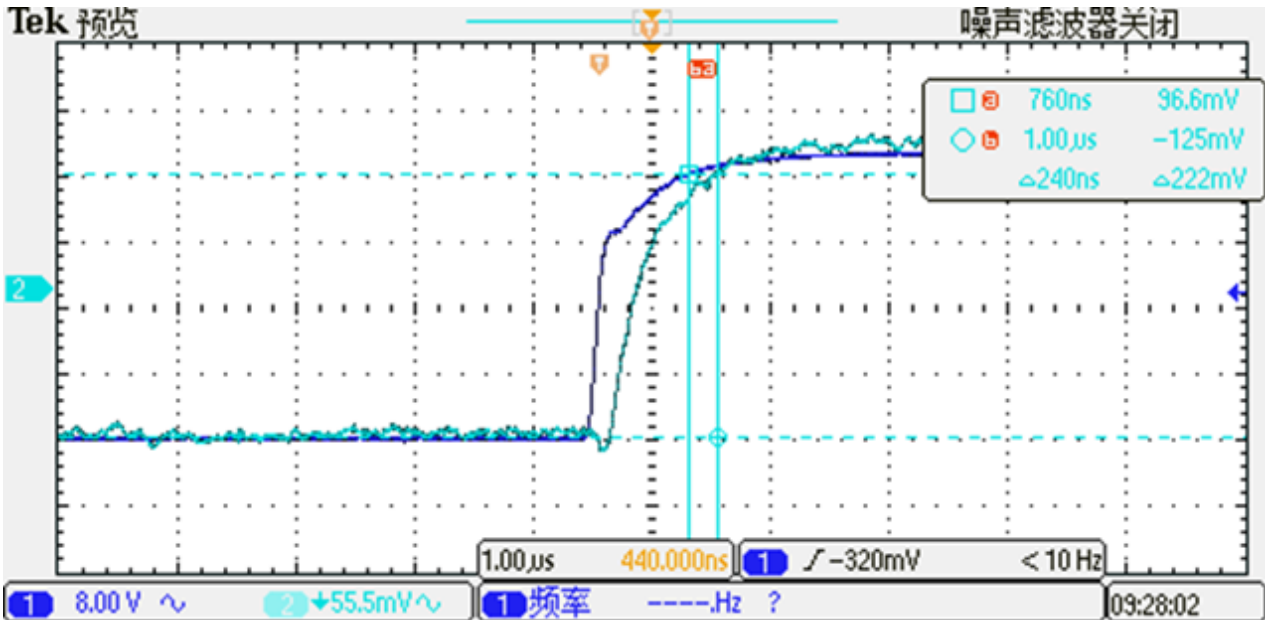


The typical high frequency response of STK-616TM current sensor. The response time from 90% of the primary current to 90% of the secondary output is 0.3 µs..


14. Typical Application of STK-616TM

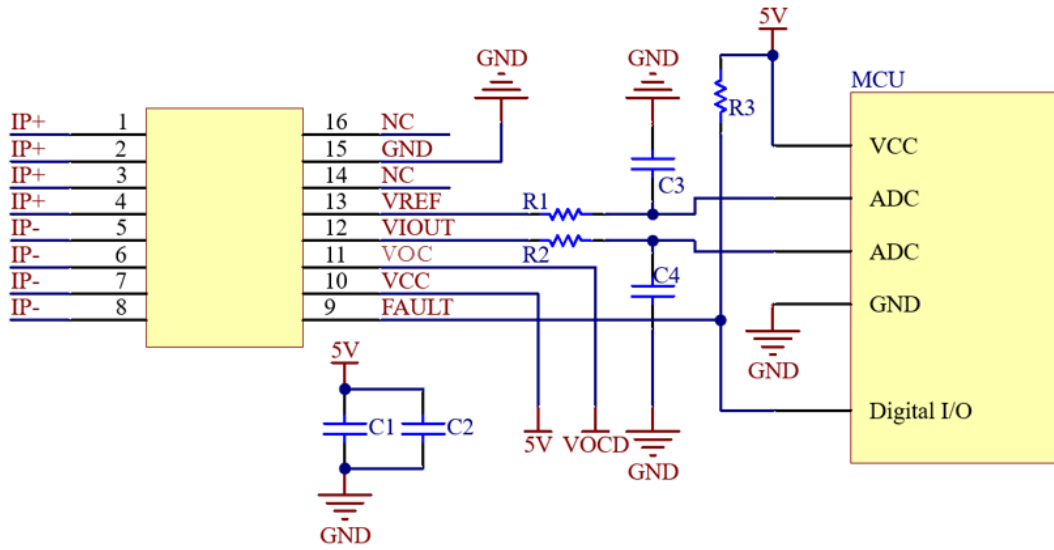

15.Examples of OCD function

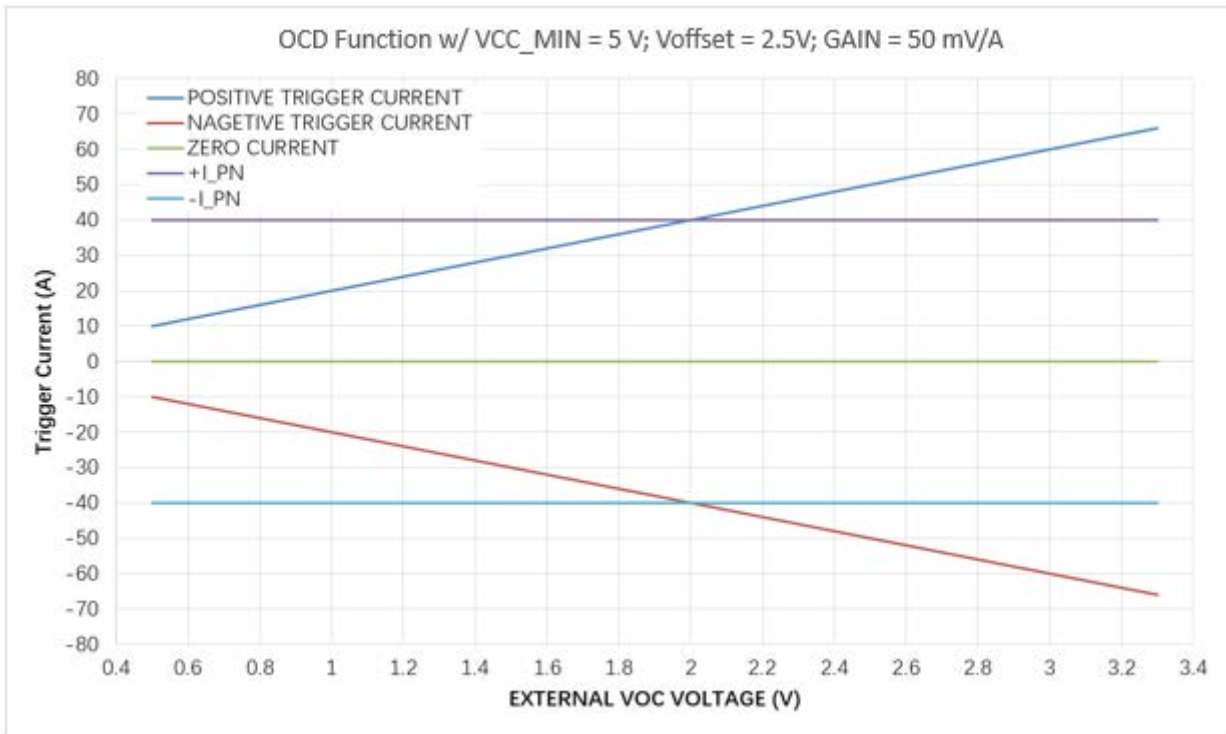

OCD function for STK-616T-40MB5

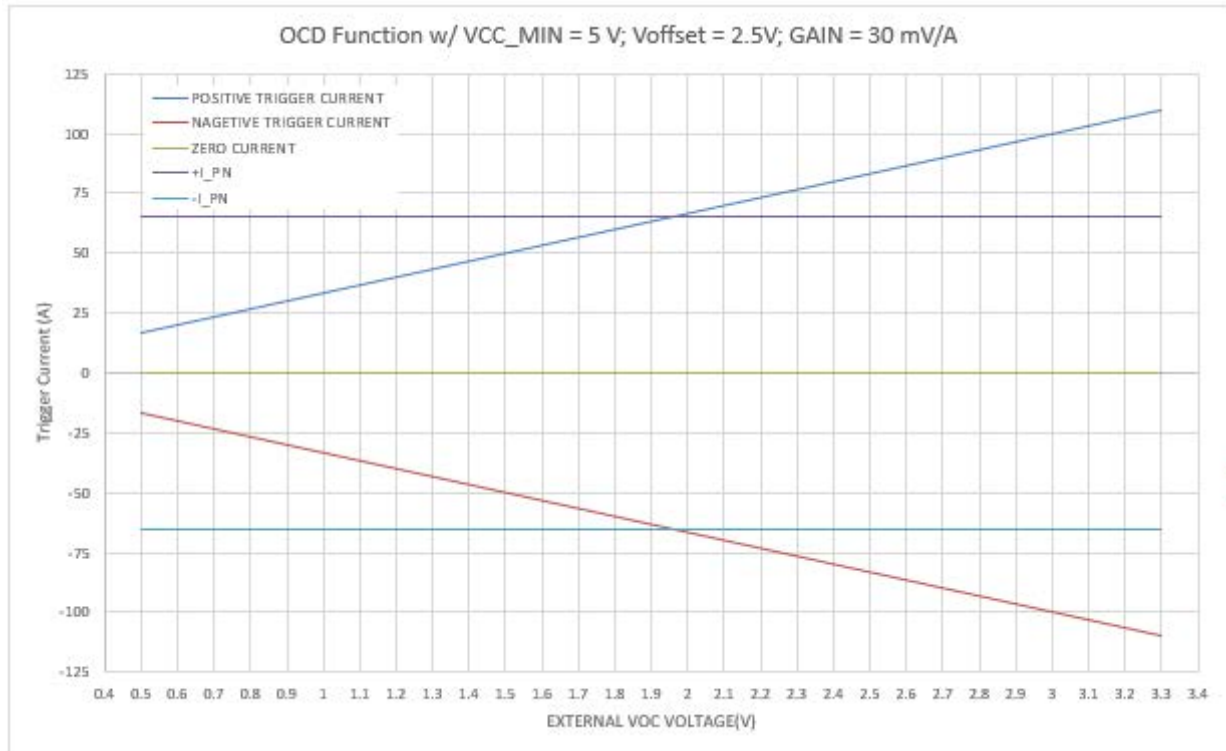


OCD function for STK-616T-65MB5

16. General information on OCD


This section describes the general information on OCD function, the specific functions, which are not listed in the section of “electrical data”, can be defined per request.

Since the trigger voltage is set after the second amplifier, the OCD function supports that the trigger current can be higher than I_{pn} . The trigger voltage can be defined:

- a) $V_{ref} = 2.5\text{ V}$
 - ①. $0.5\text{ V} \cong VOC \cong V_{cc} - 1.7\text{ V}$;
 - ②. Trigger voltage = $V_{ref} \pm VOC$;
 - ③. Trigger current = $(V_{ref} \pm VOC - V_{off}) / G_{th}$;
- b) $V_{ref} = 1.65\text{ V}$
 - ①. $0.3\text{ V} \cong VOC \cong V_{cc} - 1.7\text{ V}$;
 - ②. Trigger voltage = $V_{ref} \pm VOC$;
 - ③. Trigger current = $(V_{ref} \pm VOC - V_{off}) / G_{th}$
- c) $V_{ref} = 0.5\text{ V}$
 - ①. $0.2\text{ V} \cong VOC \cong 0.5\text{ V}$;
 - ②. Trigger voltage = $V_{ref} + 8 \cdot VOC$;
 - ③. Trigger current = $(V_{ref} + VOC - V_{off}) / G_{th}$


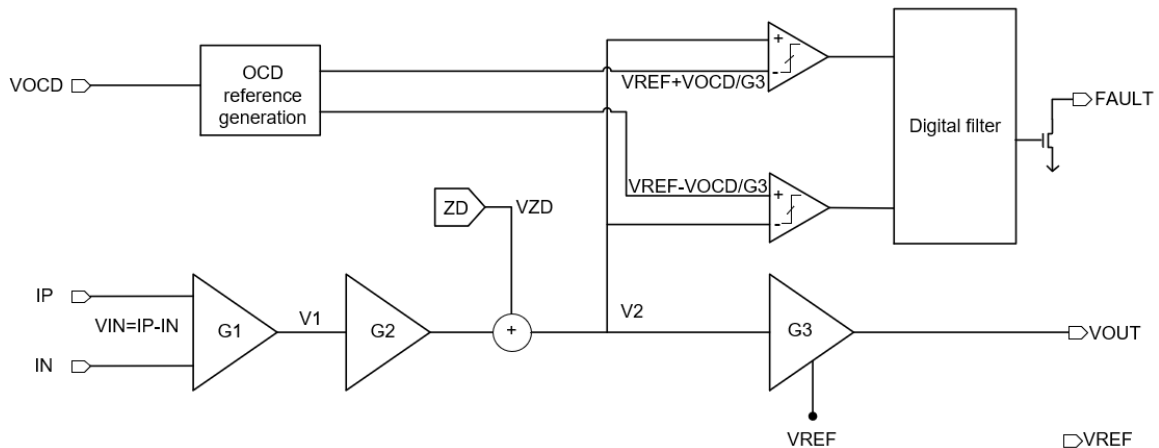


Functional Block Diagram on OCD function when $V_{ref} = 2.5\text{ V}$

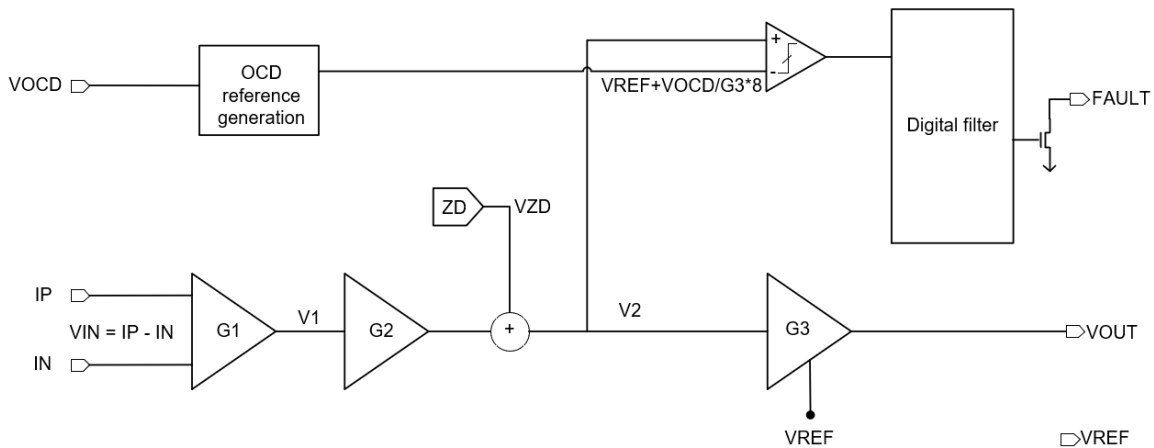


Functional Block Diagram on OCD function when $V_{ref} = 0.5\text{ V}$

With the above definition, below shows the relationship between trigger voltage and the setting of Vcc, VOC.

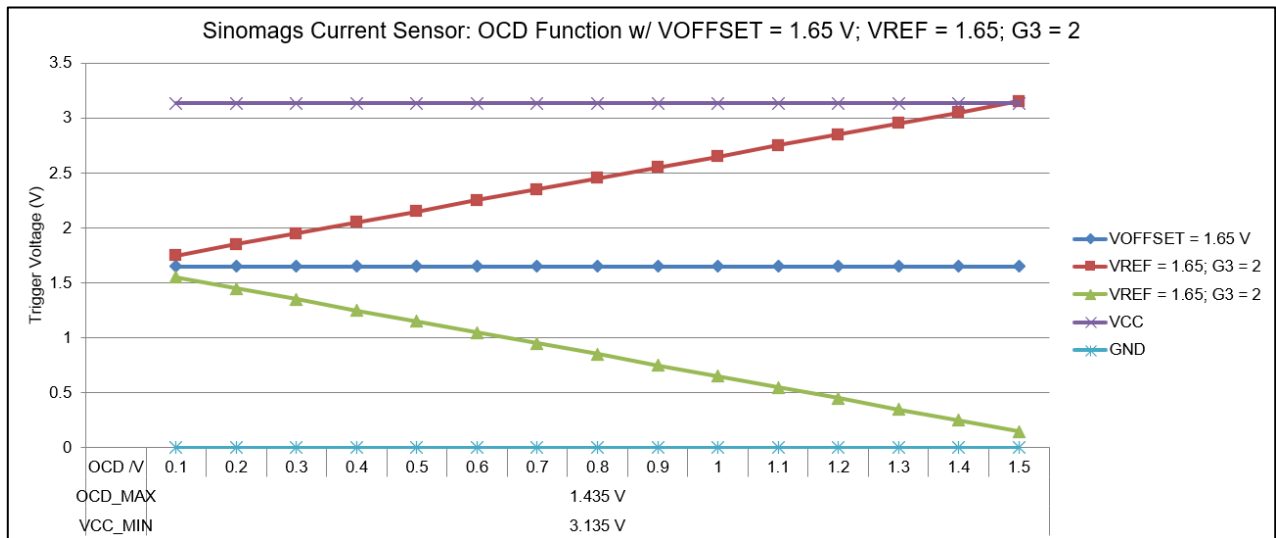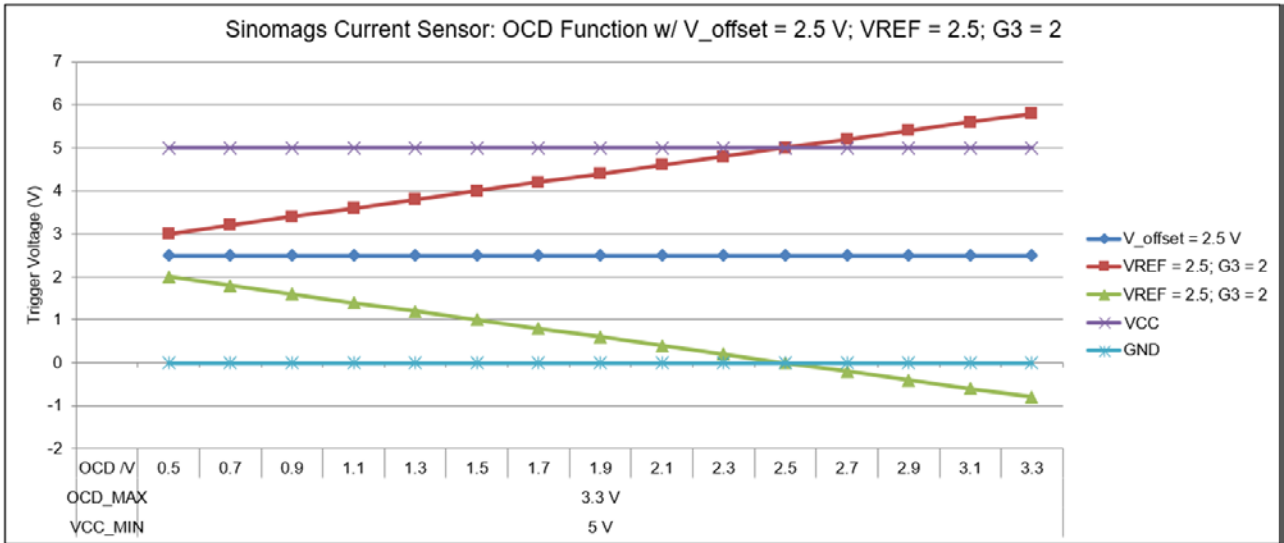

17. PACKAGE MATERIALS INFORMATION

TAPE AND REEL INFORMATION

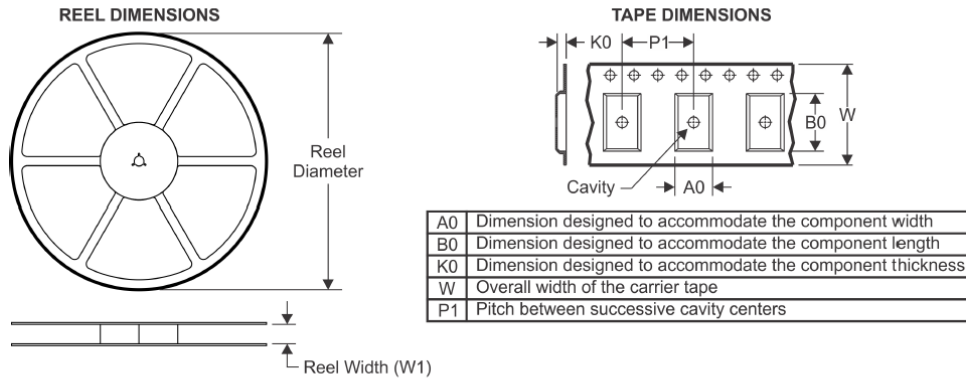

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

